



Crystalyte TC series BLDC motors parameters

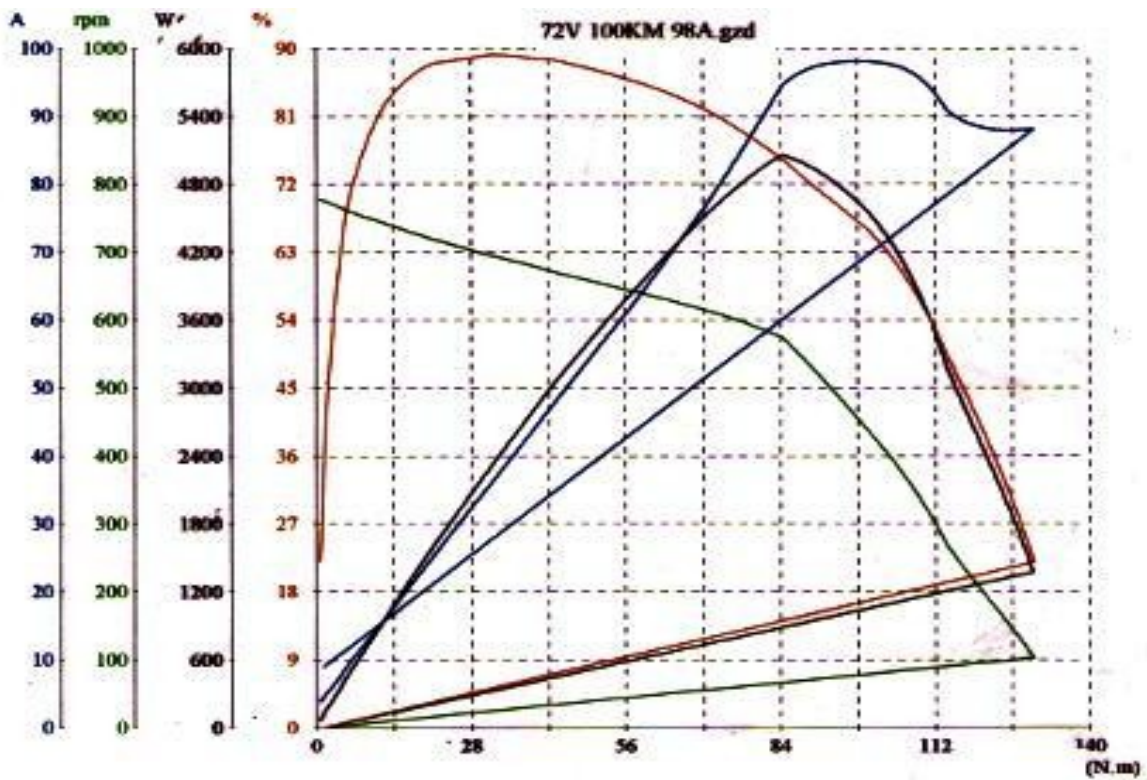

| | V | A | W | N.m | rpm | V | % | S |
|--------------|-------|-------|-------|-------|-------|-------|------|-------|
| (No_Load) | 72.12 | 3.896 | 281.0 | 0.8 | 776.2 | 62.41 | 22.2 | 0.000 |
| (Torque_max) | 71.40 | 87.84 | 6272 | 129.9 | 100.7 | 1370 | 21.8 | 118.0 |
| (Power_max) | 71.30 | 94.33 | 6725 | 84.5 | 571.6 | 5055 | 75.2 | 91.00 |
| (Eff_max) | 72.11 | 35.95 | 2592 | 31.8 | 693.7 | 2307 | 89.0 | 55.00 |
| (End) | 72.04 | 8.920 | 642.6 | 1.3 | 0 | 0 | 0 | 121.0 |

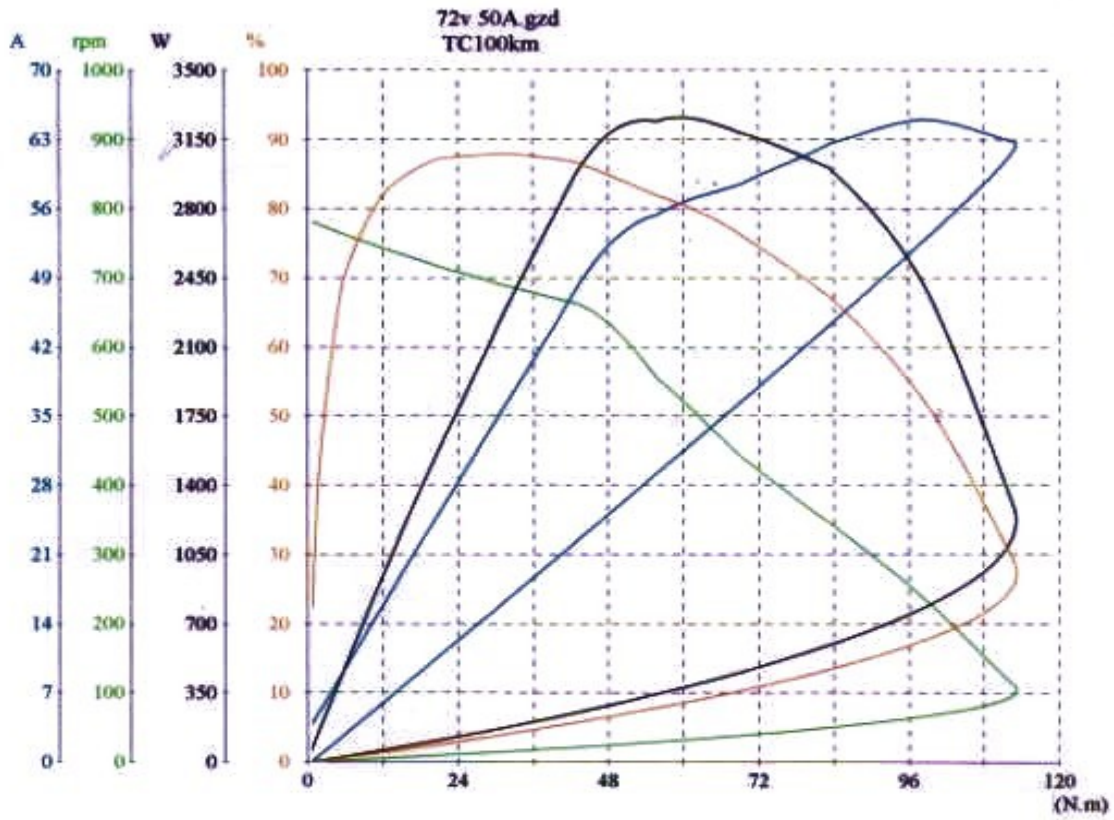

| | V | A | W | N.m | rpm | W | % | S |
|--------------|-------|-------|-------|-------|-------|-------|------|-------|
| (No Load) | 72.05 | 3.913 | 282.0 | 0.8 | 778.9 | 65.89 | 23.4 | 0.000 |
| (Torque_max) | 71.47 | 61.47 | 4393 | 118.8 | 44.3 | 550.9 | 12.5 | 112.0 |
| (Point_max) | 71.70 | 56.92 | 4081 | 60.2 | 522.1 | 3291 | 80.6 | 76.00 |
| (Eff_max) | 72.03 | 35.16 | 2533 | 30.8 | 689.6 | 2223 | 87.8 | 55.00 |
| (End) | 72.02 | 0.000 | 0.000 | 0.6 | 0 | 0 | 0 | 115.0 |

